


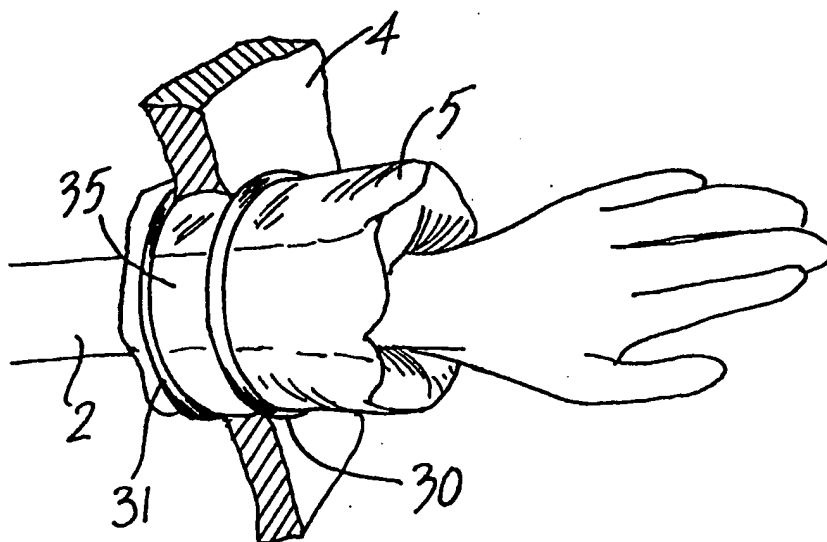

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : A61B 17/34		A1	(11) International Publication Number: WO 00/32120
			(43) International Publication Date: 8 June 2000 (08.06.00)
(21) International Application Number: PCT/IE99/00127		(74) Agents: O'BRIEN, John, A. et al.; John A O'Brien & Associates, Duncairn House, Third floor, 14 Carysfort Avenue, Blackrock, County Dublin (IE).	
(22) International Filing Date: 1 December 1999 (01.12.99)			
(30) Priority Data:		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
980999 1 December 1998 (01.12.98) IE 990107 15 February 1999 (15.02.99) IE 990108 15 February 1999 (15.02.99) IE 990110 15 February 1999 (15.02.99) IE 990112 15 February 1999 (15.02.99) IE 990416 24 May 1999 (24.05.99) IE			
(71) Applicant (for all designated States except US): ATROPOS LIMITED [IE/IE]; 1 Earlsfort Centre, Hatch Street, Dublin 2 (IE).			
(72) Inventors; and			
(75) Inventors/Applicants (for US only): BONADIO, Frank [US/IE]; 2 Martello Terrace, Bray, Co Wicklow (IE). MCMANUS, Ronan, Bernard [IE/IE]; 56 Killamey Heights, Bray, Co Wicklow (IE). YOUNG, Derek, William [IE/IE]; 3 Cloister Way, Carysfort Avenue, Blackrock, County Dublin (IE). REID, Alan [IE/IE]; 7 Kincora Drive, Clontarf, Dublin 3 (IE).		Published <i>With international search report.</i>	

(54) Title: **LAPAROSCOPIC SEALED ACCESS DEVICE**

(57) Abstract

A hand access device (1, 50, 55, 60, 65) for use as a seal for sealing a surgeon's forearm (2) on entry through a wound opening (3), for example in an abdominal wall (4) comprises a substantially tubular sleeve (5) of pliable gas tight material. The tube is turned axially back on itself to define an outer sleeve section (11) and an inner sleeve section (12) which define therebetween a sealed inflatable chamber. The inner sleeve section (12) is engaged by the forearm (2) which, on insertion, causes the sleeve to evert. The device has eversion limiting means in the form of inner and outer rings (30, 31) which are of elastomeric material.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakhstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

LAPAROSCOPIC SEALED ACCESS DEVICE

Introduction

5 The invention relates to a surgical/medical device for laparoscopic surgery to provide surgical access to the abdomen and maintain a gas-tight seal around the arm or an instrument during surgery. Surgery of this type is referred to as hand-assisted laparoscopic surgery or hand-access surgery.

10 Conventional abdominal surgery requires the creation of an incision in the abdominal wall to allow access to, and visualisation of the internal organs and other anatomical structures. These incisions must be large enough to accommodate the surgeons hands and any instruments to be utilised by the surgeon during the surgery. Traditionally the size of these incisions has been
15 dictated by the need to see, retract and palpate internal bodily structures. While a large incision will provide access to the interior of the abdomen they are associated with longer healing times, are more susceptible to infection and result in unsightly scars.

20 Alternatives to open surgery exist in the form of endoscopic or laparoscopic surgery. In this method of surgery, the surgeon operates through small incisions using remotely actuated instruments. The instruments pass through the abdominal wall using devices called trocars. These working channels typically have a diameter ranging from 5 to 25 millimetres. Vision is provided using a laparoscope
25 which is typically 20 to 25 centimetres long and uses fibre-optic technology or a CCD camera to provide the operator with a picture of the interior of the abdomen. The abdomen must be insufflated with a gas such as carbon dioxide or nitrogen to maintain a bubble effect and provide a viable working space for the operator to perform the surgery unhindered by the lack of space. This insufflation
30 creates a working space known as the pneumoperitoneum. Trocars through which

- 2 -

instruments are inserted are constructed to prevent loss of the gas through them resulting in collapse of the pneumoperitoneum.

5 The benefits of laparoscopic surgery are numerous. Recovery times have been shown to be reduced due to the absence of a large incision. This has benefits for the patient, the health care organisation and society. The benefits to the patient are reduced stay in hospital, faster mobilisation and return to normal activity. The benefits to the health care organisation is also due to the reduced stay in hospital which is often the most expensive aspect of health care provision. Society benefits
10 in faster return to work and normal activity of the patient.

However, not all surgical procedures can be performed laparoscopically. Surgery requiring the removal of large organ specimens, such as surgery for removal of the colon, has traditionally been hampered by the small incisions used for the
15 introduction of laparoscopic instruments in the surgery.

The other major disadvantages of laparoscopic surgery are due to the complex nature of the technique. Surgeons who wish to practise laparoscopic surgery must spend much time training to master the technique. The success of laparoscopic
20 surgery depends on the skill of the surgeon to manipulate organs and carry out delicate tasks using remotely actuated instruments. Unfortunately in laparoscopic surgery the surgeon is insulated from the material that they are working on. This deprives the surgeon of tactile feedback and the ability to palpate delicate structures. The surgeon's most effective instrument, the hand, is reduced to a
25 device that must simply actuate instruments that are inherently lacking in dexterity and operability due to the constraints on their design placed by the nature of the narrow channels in trocars through which they must pass. Another disadvantage of laparoscopy is that the image viewed by the surgeon is a two dimensional image on a video screen. The surgeon loses three dimensional

perspective of depth and distance and awareness of the proximity of other structures during video laparoscopy.

5 These disadvantages have led to long learning curves for the practitioners of laparoscopic surgery, required highly skilled and co-ordinated surgical teams and has limited the application of laparoscopic surgery to relatively simple surgical procedures.

10 Recently, new surgical techniques have been developed that combine the advantages of both open surgery and laparoscopic surgery. In these new techniques surgery is carried out using a laparoscopic approach with the addition of a slightly larger incision to allow the surgeon to insert a hand into the insufflated abdomen. This is often referred to as hand-assisted laparoscopic surgery or HALS.

15 HALS allows surgeons to regain the tactile feedback and three-dimensional perspective lost in the conversion from open to laparoscopic procedures. It also permits rapid finger dissection, enhanced retraction capabilities and simplified haemostasis. There are several publications in the literature describing procedures
20 carried out using a hand-assisted approach. These include total and sub-total colectomy, rectopexy, Nissen's fundoplication, gastrectomy, splenectomy, nephrectomy, pancreatectomy and others. Some of these procedures were previously performed using an open technique only. Over the past few years several centres have been investigating HALS with surgical device companies and
25 increasing the literature on the subject. With the advent of surgical devices for facilitating HALS it is expected that more open surgical procedures will be converted to HALS procedures.

30 The key to the success of hand-assisted laproscopic surgery is to provide that seals to the wound edge and to a surgeons arm to maintain the pneumoperitoneum

- 4 -

required. The device should provide freedom of movement including rotational, lateral and translational; In addition it should be possible to use laparoscopic instruments with the device.

5 Various hand access devices have been proposed however, to date, no hand access device is available that adequately addresses these key issues.

10 US-A-5366478 (Brinkerhoff et al) describes a device which is said to be for use during endoscopic surgery, the device having two inflatable toroidal sections connected by a transitional section. The transitional section is said to function to allow the passage of air from one toroid to the other toroid on inflation of the device. Each toroidal section contains a flexible stiffening ring. The stiffening ring in the outer toroid is illustrated in a position floating above the abdominal wall after inflation. It is unclear how this stiffening ring maintains this configuration. It is therefore unlikely that this device will operate as described. Also it is difficult to pass an object such as a surgeon's forearm through a lumen in the transitional section, because of frictional resistance to the movement of the object relative to the transitional section.

20 A medical device for forming an external extension of the pneumoperitoneum is described in US-A-5480410 (Cuschieri et al). The device includes an enclosure sealed into a trocar puncture site in an abdominal wall. Insufflation gas passes from the body cavity into the enclosure inflating it. A number of valved openings are provided on the device to enable access to the enclosure interior.

25 In US-A-5514133 (Golub et al) describes an endoscopic surgical apparatus, which enables a surgeon to access a surgical site through an opening. The apparatus includes two plates, which engage the outer and inner surfaces of the abdominal wall, and a sealing member, which inhibits the flow of gas through the opening.

30 The seal in this apparatus does not maintain complete insufflation of the body

cavity, gas can gradually leak out through the flapvalves and seal. The valve configuration also makes it impossible to extracorporealise an organ, which is preferred in hand-assisted surgery devices. The device also has a complicated construction.

5

A surgical glove suitable for endoscopic surgical procedures is disclosed in US-A-5526536 (Cartmill). The glove has an inflatable wrist section, which when inflated, provides a seal between the surgeon's hand and the body wall. The surgeon's gloved hand must remain in the body cavity to maintain insufflation of the body cavity. Therefore this device also restricts the actions of the surgeon.

10

US-A-5522791 (Leyva), describes an abdominal retractor, which retracts an abdominal incision providing access for a hand into a body cavity. The hand is passed into a sleeve and sealed therein, the other end of the sleeve being mounted to the retractor.

15

Devices for sealing a surgical incision while providing access for a surgeon's hand are also known. For example, a method of performing laparoscopic surgery is described in US-A-5636645 (Ou), which includes the steps of inserting a surgeon's gloved hand into a body cavity and sealing the hand to body tissue surrounding the cavity. This method restricts the actions of the surgeon because the surgeon's gloved hand must remain in the body cavity sealed to the surrounding tissue to maintain insufflation of the body cavity. The seal between the surgeon's gloved hand and the surrounding tissue must be re-established each time the gloved hand is inserted into the body cavity, if insufflation of the body cavity is to be maintained.

20

25

An apparatus and a method for carrying out minimally invasive laparoscopic surgery is also described in US-A-5640977 (Leahy et al). A surgeon's hand is

- 6 -

passed through a sleeve to access a body cavity, the sleeve being sealed around the surgeon's forearm.

5 US-A-5653705 (de la Torre et al) discloses an envelope, which provides access for an object passing into a body tissue incision, while maintaining insufflation of the body cavity. A first opening in the envelope is sealed around the body tissue incision and a second opening is sealed around an object passed into the envelope.

10 Devices for use during surgery which provide access to a surgical site and effect a seal independent of a surgeon's hand are also known. In general devices of this type are positioned predominantly external to a body cavity, and are complex, large and bulky. These devices prove difficult to use because they are cumbersome and/or because of their complexity. For example, a flexible, fluid-tight envelope which provides access for an object passing through a body tissue
15 incision while maintaining insufflation pressure is described in US-A-5672168 (de la Torre et al). This is a complex device including a first opening secured and sealed to the body tissue incision, and a second opening distal from the body tissue incision and sealed to a surgeon's forearm. The device also includes a housing containing a valve element at the body tissue incision.

20 An access port device for use during a surgical procedure is described in US-A-5803921 (Bonadio). An object is passed into the device sleeve, the device is sealed around the object at the sleeve opening and the device is also sealed at the body cavity. The seals maintain insufflation of the patient's body cavity. However it
25 may be difficult to pass an object through the access port device and into the body cavity because of frictional resistance to the movement of the object relative to the device sleeve. An adhesive flange is required to stick to the abdominal wall. This is not very effective and can become undone due to the presence of moisture around the wound edge. The device provides no retraction force and the walls of
30 the incision are displaced only when an object is inserted through it. The feathered

- 7 -

valve is not an effective means of sealing and there may be leakage insufflation gas.

5 US-A-5741298 (MacLeod) describes a method for performing surgery using a multi-functional access port. The access port has a sealing ring which protects the body wall incision from contamination. A sealing cap or a surgical glove is connected to the sealing ring to maintain insufflation of the body cavity. This surgical method is also restrictive because the surgeon's gloved hand must remain
10 sealed to the sealing ring, if body cavity insufflation is to be maintained.

A surgical apparatus for use during hand assisted minimally invasive surgery is described in US-A-5813409 (Leahy et al). A sleeve is mounted at one end to a body tissue incision. The sleeve seals to the surgeon's hand to maintain
15 pneumoperitoneum. Surgical instruments may then be passed into the sleeve to a surgeon's hand within, which may then be inserted into the incision. This device requires a multistep process for installation and comes in several parts. The device takes up a large amount of space on the abdomen and the application of the wound-retractor component is cumbersome.

20 US-A-5906577 (Beane et al) describes a retractor device for retracting the edges of an incision to form an opening to a body cavity. A flexible sleeve is mounted to the retractor, and an object passed through the device is sealed to maintain insufflation of the body cavity. This device also consists of many component parts
25 that must be assembled carefully. The device has a very constricting and uncomfortable seal to the arm. The retraction mechanism can pop out easily, causing complete loss of pneumoperitoneum, making the device disadvantageous. It also has a large abdominal footprint.

- 8 -

WO 98/35615 (Crook) describes a device for performing HALS that consists of a wound-edge retractor to which is attached a sleeve similar to others mentioned above. This device also consists of several component parts and has a complicated installation procedure.

5

Generally known devices are difficult to use because they are cumbersome and/or because of their complexity.

10

US-A-5545179 (Williamson) describes an access assembly, which provides access for surgical instruments to a body cavity during surgery and seals the instruments passing into the body cavity. A sealing sleeve is inflated to form a large balloon portion within the body cavity, the balloon portion being constrained to remain within the body cavity. Therefore it is difficult to retract a surgical instrument through the balloon portion of the assembly and out of the body cavity, because of frictional resistance to the movement of the surgical instrument relative to the balloon sleeve.

15

20

An access port device for use during hand-assisted laparoscopic surgery is described in JP 10-108868 (Tamai, Shitomura). This single-piece device consists of a wound retractor component to which is attached an iris valve. The wound retractor component is made of two rings, an inner ring and an outer ring joined by a silastic sleeve to provide a retractive force. The device is inserted into an incision and the surgeon's hand may be inserted through the device. The iris valve is then closed around the arm to effect a seal to prevent the escape of insufflation gas. Due to the nature of the inner ring and the silastic sleeve the device may be easily dislodged. The iris valve is not an effective seal, especially during lateral movement of the surgeon's arm. In addition the device does not facilitate translation movement or reach because of the seal of the iris valve.

25

30

- 9 -

There is therefore a need for a sealing device, which provides effective sealing means to seal an object passing through the device, and which is convenient and easy to use, compact and neat, and may be used repetitively with minimum delay and minimum effort.

5

Statements of Invention

According to the invention there is provided a surgical access device for use in laproscopic surgery through an opening comprising:-

10

a sleeve of pliable material, the sleeve having an outer sleeve section and an inner sleeve section;

15

a chamber for pressurised fluid defined between the inner and outer sleeve sections;

20

the inner sleeve section defining a lumen for receiving an object such as a surgeons arm or an instrument therein;

25

the sleeve being evertable on engagement of an object in the lumen and axial movement relative thereto so that the inner sleeve section is rolled over outwardly to become an outer sleeve section and the outer sleeve section is correspondingly rolled over inwardly to become an inner sleeve section; and

30

at least one eversion limiting means to limit the eversion of the sleeve into an opening.

- 10 -

In one embodiment of the invention the sleeve is axially turned back on itself to define the outer sleeve section and the inner sleeve section.

5 In a particularly preferred embodiment the nominal diameter of the outer sleeve section is the same as the diameter of the inner sleeve section.

The chamber is preferably fluid impermeable. Ideally the chamber has a port for inflation of the chamber.

10 In one embodiment of the invention the device includes a first eversion limiting means for location externally of the opening and a second eversion limiting means for location internally of the opening.

15 Preferably the or each eversion limiting mean is an O-ring.

The O-ring is of a resilient material.

20 In one embodiment the or each eversion limiting means is housed in the chamber. In this case preferably the or each eversion limiting means is movable axially in the chamber.

In one embodiment there are two eversion limiting means and both are independently movable in the chamber.

25 In another embodiment there are two eversion limiting means and a linkage means is provided between them. The linkage means may be of pliable material. Preferably the linkage means comprises a linkage sleeve.

30 In one embodiment the device includes a sealing means to seal an object to be passed through the access opening. The sealing means may preferably comprise a

- 11 -

glove to receive a surgeons hand and/or forearm. Preferably sealing means is attached to the sleeve.

5 Brief Description of the Drawings

The invention will be more clearly understood from the following description thereof given by way of example only with reference to the accompanying drawings, in which:-

10

Fig. 1 is a perspective view of a hand access device according to the invention;

Fig. 2 is a cross sectional view of the device of Fig. 1;

15

Figs. 3 and 4 are a perspective views of the device being inserted into an incision in an abdominal wall;

20

Fig. 5 to 7 are perspective, partially cross sectional views of a surgeons hand being inserted through the device;

Fig. 8 is a distal end view of the device with a hand in place;

25

Fig. 9 is a perspective, partially cross sectional view of the hand access device with a surgeons hand fully inserted;

Fig. 10 is a perspective view of the device in an intermediate position on a surgeon's arm;

- 12 -

Fig. 11 is a cross sectional view of the device of Figs. 1 to 10 in position ready to receive a surgeon's arm;

5

Fig. 12 is a cross sectional view similar to Fig. 11 with the device inserted through an incision;

Fig. 13 is a perspective, partially cut-away view of another hand access device of the invention;

10

Fig. 14 is a perspective, partially cut-away view of a further hand access device of the invention, in use;

Fig. 15 is a perspective, partially cut-away view of another hand access device of the invention;

15

Fig. 16 is a view of the device of Fig. 15, in use;

Fig. 17 is a perspective, partially cut-away view of a further hand access device of the invention;

20

Fig. 18 is a view of the device of Fig. 17, in use;

Fig. 19 is a perspective, partially cut-away view of a still further hand access device of the invention; and

25

Fig. 20 is a view of the device of Fig. 19, in use.

30

Detailed Description

Referring to the drawings and initially to Figs. 1 to 13 there is illustrated a hand access device 1 according to the invention for use as a seal for sealing a surgeon's forearm 2 on entry through a wound opening 3, for example in an abdominal wall 4.

The device 1 comprises a substantially tubular sleeve 5 of pliable gas tight material formed from a tube of a suitable biocompatible plastics material. The tube is turned axially back on itself to define an outer sleeve section 11 and an inner sleeve section 12.

The inner and outer sleeve sections 11, 12, define therebetween a sealed inflatable chamber 20. The inner sleeve section 12, defines a lumen 25 and, on inflation of the chamber 20, the inner sleeve section 12 engages an object extending or passing through the lumen 25.

The hand access device includes an eversion limiting means for the sleeve 5. The eversion limiting means is in this case provided by a first O-ring 30, which is attached to the sleeve 5 and a second O-ring 31, which is attached to an axially spaced-apart location on the sleeve 5. The inner O-ring 30 is of a suitable resilient elastomeric material for bunching of the ring 30 to facilitate ease of insertion into a wound 3 as illustrated in Figs. 3 and 4.

As a surgeon inserts his forearm 2 through the lumen 25 of the device 1, the inner sleeve section rolls 12 along with the arm 2 and in turn the outer sleeve section 11 everts. An seal is maintained around the surgeon's forearm 2 and the sealed integrity of the body cavity being operated upon is substantially maintained. To facilitate insertion of the surgeon's arm 2 lubrication may be used. The device 1

- 14 -

and may be inflated prior to or during use through a suitable inflation line 28 fitted with a valve 29.

5 A wound protector section 35 of the sealing device between the rings 30, 31 may be of a plastics sheet material that has a greater flexibility than that of the main body of the sleeve 5. In this way, on inflation of the sleeve 5 the protector section 35 stretches to conform closely to the irregular shape of the wound 3 and provide a tight seal to the wound opening 3. In addition, the inner ring 30 is drawn against the inner wall surrounding the wound 3, on inflation of the sleeve 5. The
10 arrangement also facilitates lubricated rotation of the protector section 35 which facilitates insertion of a surgeon's arm 2.

The inner O-ring 30 may have a larger diameter than that of the outer O-ring 31 to create a tapering effect. This arrangement promotes a pressure differential which
15 assists insertion of a surgeon's arm 2 acting against the internal abdominal pressure.

The invention provides a device which allows laparoscopic surgeons insert their hand into the abdominal space during laparoscopic surgery and to regain the
20 tactile feedback, three dimensional perspective and general use of the hand as an operative tool as it was in open surgery. The device is easy to insert into a small incision and easy to withdraw from the same incision. The device facilitates ease of movement within the device so that the device is not a hindrance to the performance of the surgery. A seal is provided to both the operator's forearm and
25 to the wound edges so as to substantially prevent the escape of gases used to maintain the pneumoperitoneum.

In addition the device allows the removal of organ specimens from the abdominal cavity through the device for the purpose of either removing them completely
30 from the body or for performing a surgical procedure on them while they are

- 15 -

temporarily removed from the body or extracorporealised. The invention allows an operator to remove the hand from the device and leave the device in place while substantially maintaining the pneumoperitoneum.

5 The device consists of a double-layer polymeric sleeve through which the operator can extend his hand into the abdomen. The device is held in place in the abdominal incision by an arrangement of rings attached to the outer layer of the sleeve and extending around the outer layer of the sleeve. The purpose of the rings is to provide an anchorage for the polymeric sleeve when it is in the abdominal
10 incision. A stopcock valve and inflation bulb allow the device to be inflated when it is in position in the incision.

When the device is in its correct position and is inflated the lumen substantially closes and the device seals up against the edges of the incision, thus substantially
15 preventing the escape of gas from the pneumoperitoneum to the exterior either through the device or between the device and the edges of the incision. If the operator's hand is within the sleeve when it is inflated, the lumen will close around the arm and effect a seal. The operators hand need not be within the device when it is inflated. The operator's hand may be inserted into the abdominal
20 cavity through the device after it has been inflated.

The access device may be used for insertion of an instrument which may be of any suitable cross section such as circular or square.

25 Referring to Fig. 13 there is illustrated another hand access device 50 which is similar to the device described above and like parts are assigned the same reference numerals. In this case a surgical glove 51 is attached to the sleeve 5, for example by a heat welded seam 52. This enhances the seal to the surgeons arm as the seam 52 prevents egress of gas. The glove 51 may be of any suitable material

- 16 -

which may be stretchable and/or pliable. In this case only an outer eversion limiting ring 31 is provided.

5 Referring to Fig. 14 there is illustrated a modified hand access device 55 according to the invention. In this case an inner ring 56 is enclosed in a pocket 57 on the sleeve 5 while an outer ring 58 is free to move between the walls of the sleeve.

10 Referring to Figs. 15 and 16 there is illustrated another hand access device 60 in which eversion limiting rings 61, 62 are free to move axially inside the sleeve 5. The device is used as described above, the outer ring 61 engaging the outside of the abdominal wall on insertion to limit eversion into the incision. The inner ring 62 is free between the walls of the sleeve 5 when the sleeve is fully everted into the wound as illustrated in Fig. 16. On withdrawal of a surgeons arm eversion of the sleeve outwardly is limited by engagement of the ring 62 against the inside of the abdominal wall. One advantage of this arrangement is that the same device may be used for a wide range of different thicknesses of abdomen.

15 Referring to Figs. 17 and 18 there is illustrated another hand access device 65 which is again similar to those described above. In this case inner and outer rings 66, 67 are not attached to the sleeve 5, however a linking section 68 of pliable material extends between the rings 66, 67.

20 Referring now to Figs. 19 and 20 there is illustrated another hand access device 70 according to the invention. In this case an inner ring 71 is held in a desired axial position in the sleeve 5 by adhesive tapes 73. An outer ring 72 is free to move axially within the sleeve.

- 17 -

Reference is also made to appropriate alternatives and modifications which are outlined in our parallel applications referenced ATRO1/C, ATRO12/C, ATRO14/C/, ATRO15/C, ATRO16/C/, the entire contents of which are incorporated herein by reference.

5

The invention is not limited to the embodiments hereinbefore described which may be varied in construction and detail.

10

15

Claims

1. A surgical access device for use in laproscopic surgery through an opening comprising:-

5

a sleeve of pliable material, the sleeve having an outer sleeve section and an inner sleeve section;

10

a chamber for pressurised fluid defined between the inner and outer sleeve sections;

15

the inner sleeve section defining a lumen for receiving an object such as a surgeons arm or an instrument therein;

20

the sleeve being evertable on engagement of an object in the lumen and axial movement relative thereto so that the inner sleeve section is rolled over outwardly to become an outer sleeve section and the outer sleeve section is correspondingly rolled over inwardly to become an inner sleeve section; and

25

at least one eversion limiting means to limit the eversion of the sleeve into an opening.

2. A device as claimed in claim 1 wherein the sleeve is axially turned back on itself to define the outer sleeve section and the inner sleeve section.

30

3. A device as claimed in claim 1 or 2 wherein the nominal diameter of the outer sleeve section is the same as the diameter of the inner sleeve section.



- 19 -


4. A device as claimed in any preceding claim wherein the chamber is fluid impermeable.
- 5 5. A device as claimed in any preceding claim wherein the chamber has a port for inflation of the chamber.
6. A device as claimed in any preceding claim including a first eversion limiting means for location externally of the opening and a second eversion limiting means for location internally of the opening.
- 10 7. A device as claimed in any preceding claim wherein the or each eversion limiting mean is an O-ring.
- 15 8. A device as claimed in claim 7 wherein the O-ring is of a resilient material.
9. A device as claimed in any preceding claim wherein the or each eversion limiting means is housed in the chamber.
- 20 10. A device as claimed in claim 9 wherein the or each eversion limiting means is movable axially in the chamber.
11. A device as claimed in claim 10 wherein there are two eversion limiting means and both are independently movable in the chamber.
- 25 12. A device as claimed in claim 10 wherein there are two eversion limiting means and a linkage means is provided between them.
13. A device as claimed in claim 12 wherein the linkage means is of pliable material.
- 30


- 20 -



14. A device as claimed in claim 12 or 13 wherein the linkage means comprises a linkage sleeve.
- 5 15. A device as claimed in any preceding claim including a sealing means to seal an object to be passed through the access opening.
16. A device as claimed in claim 15 wherein the sealing means comprises a glove to receive a surgeons hand and/or forearm.
- 10 17. A device as claimed in claims 15 or 16 wherein the sealing means is attached to the sleeve.
18. An access device substantially as hereinbefore described with reference to the accompanying drawings.
- 15


20

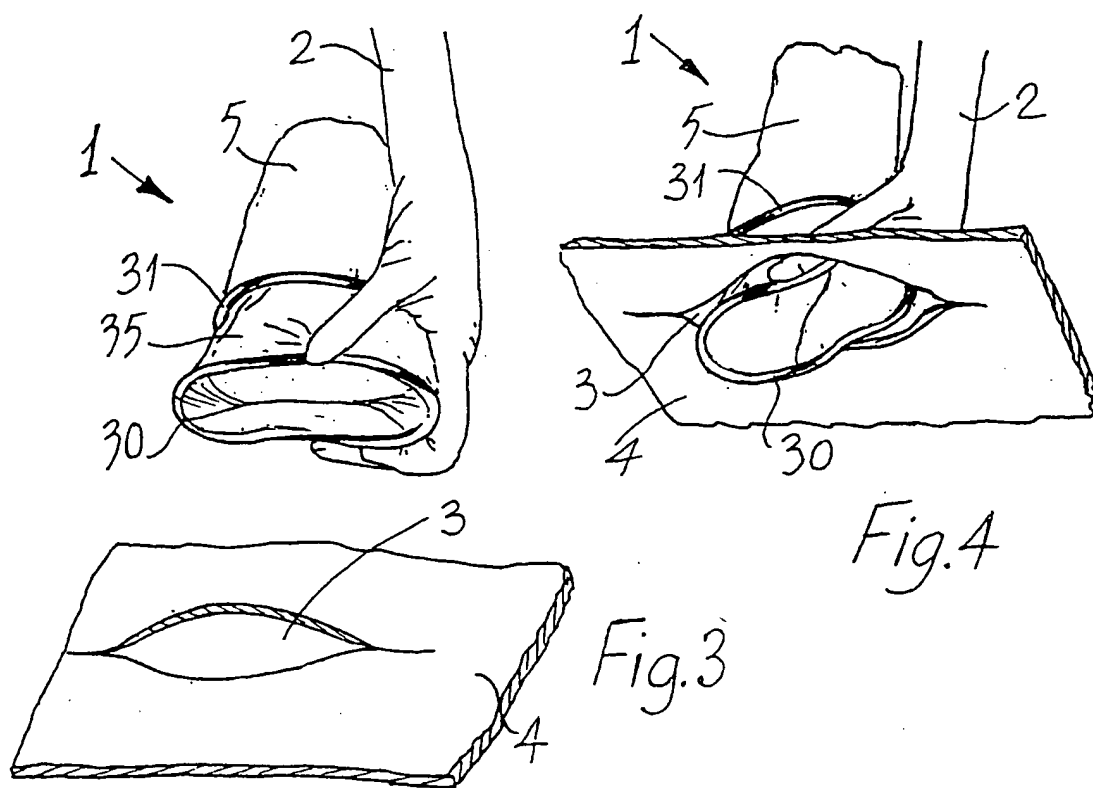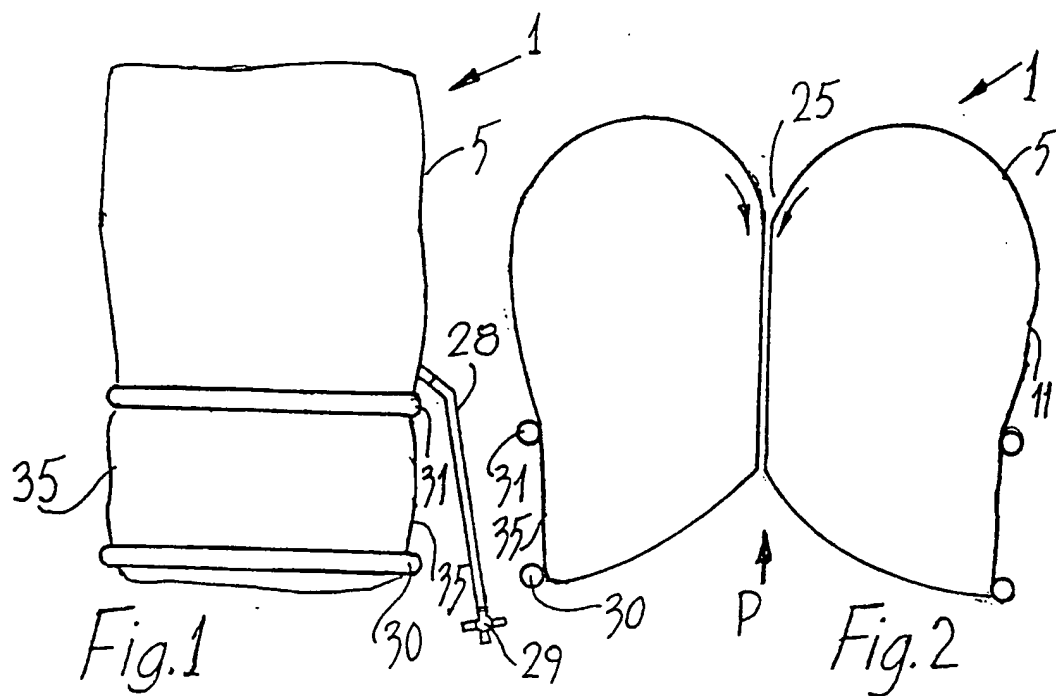



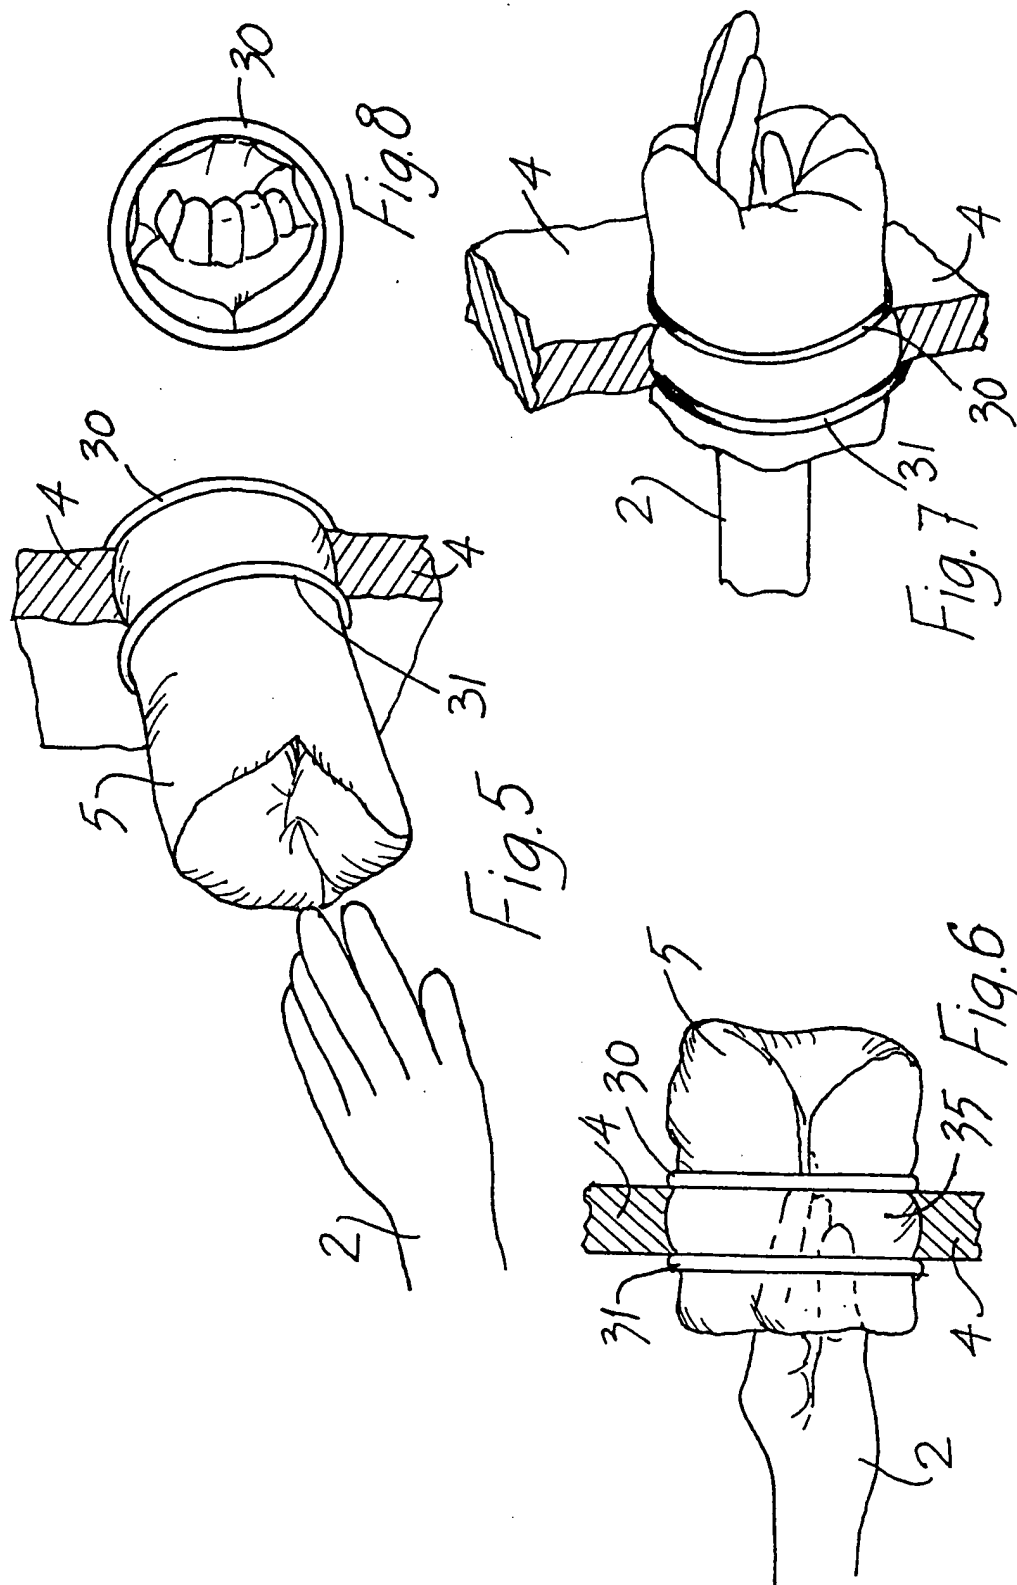



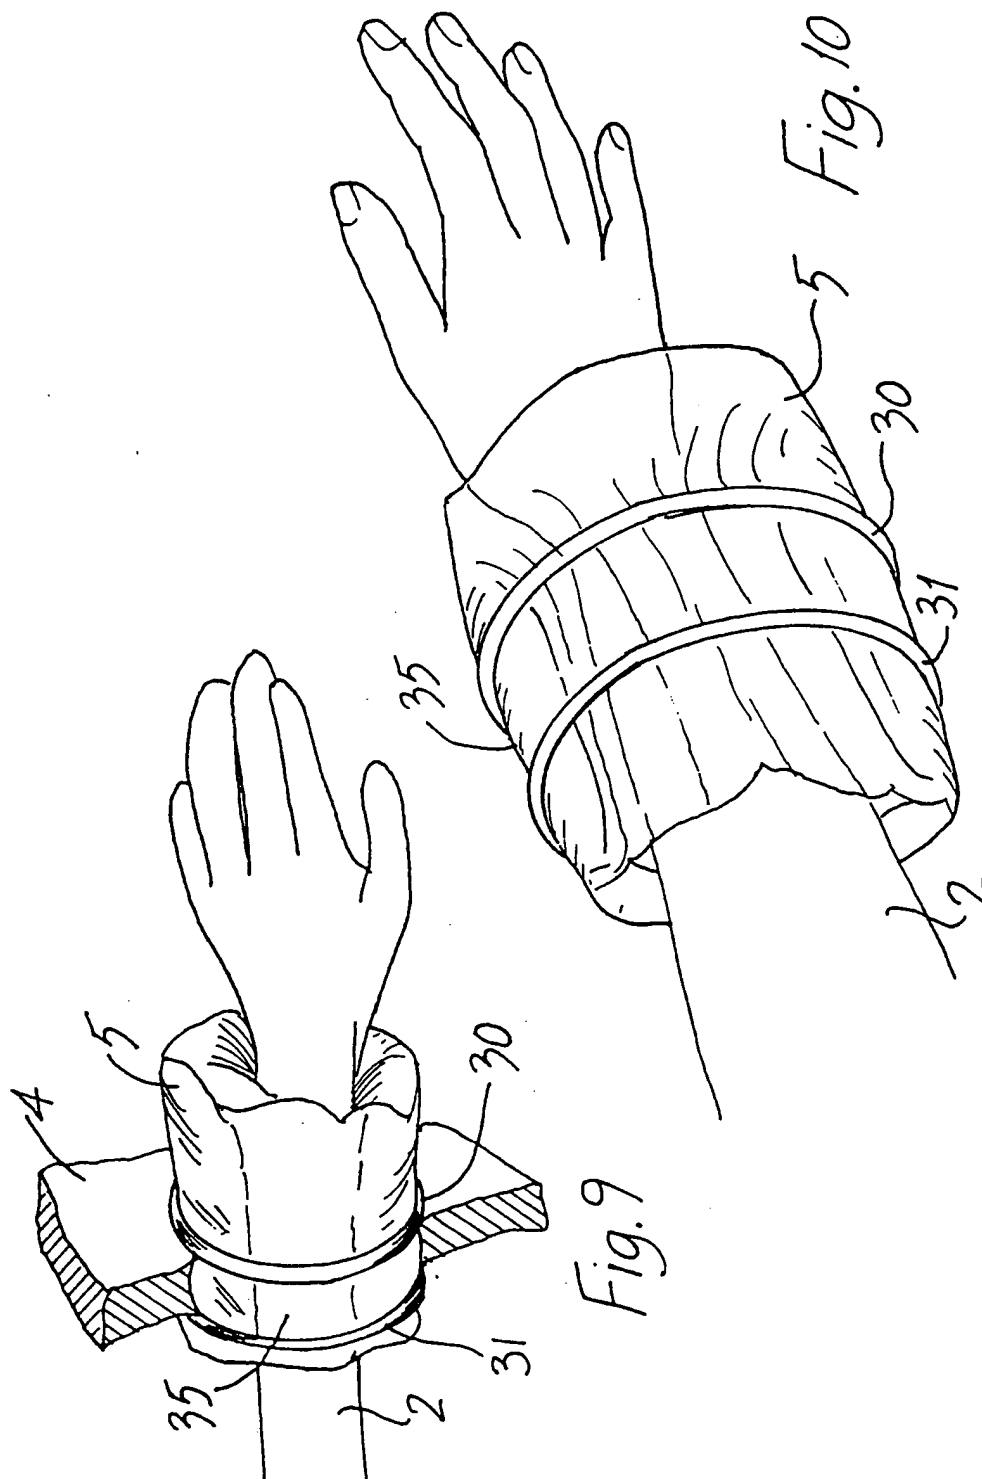


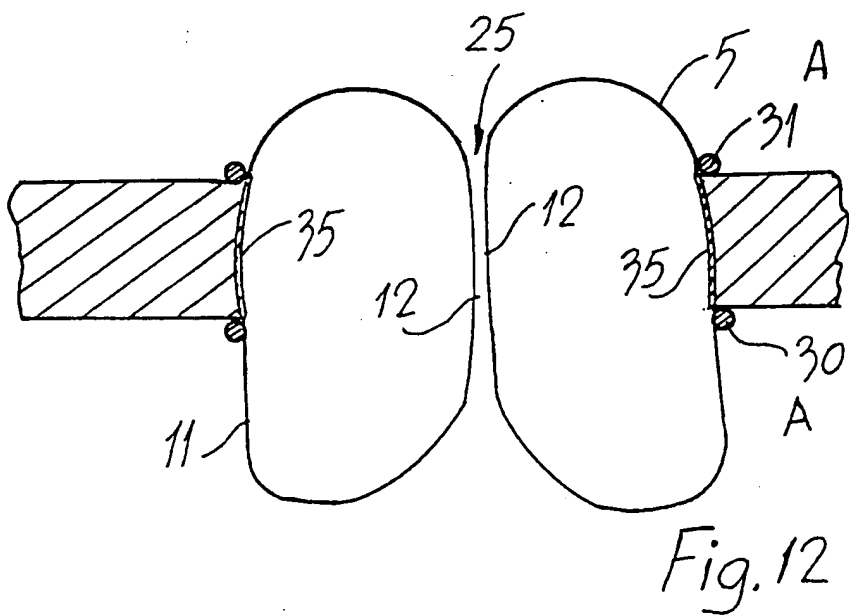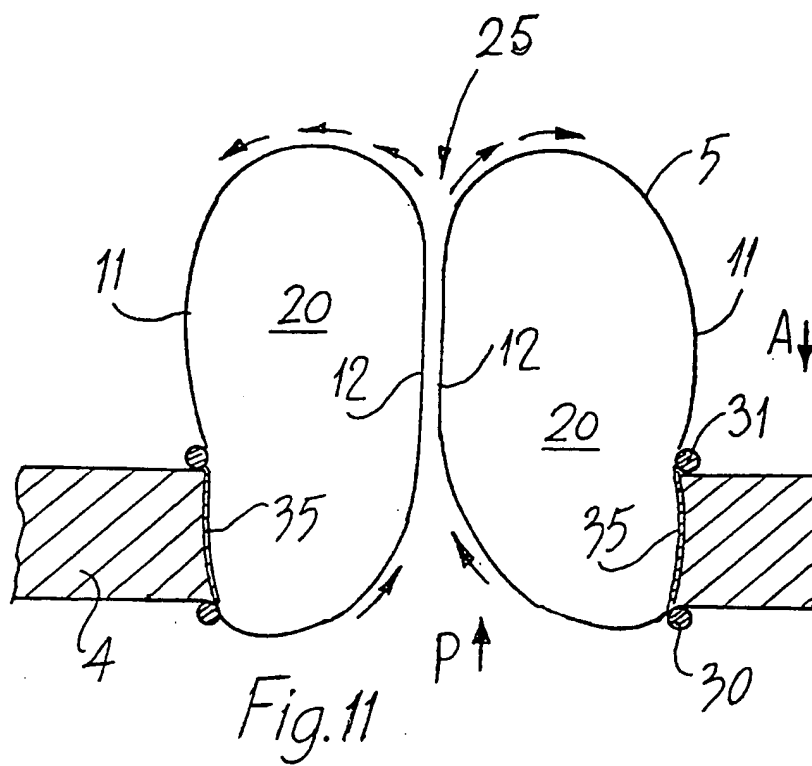

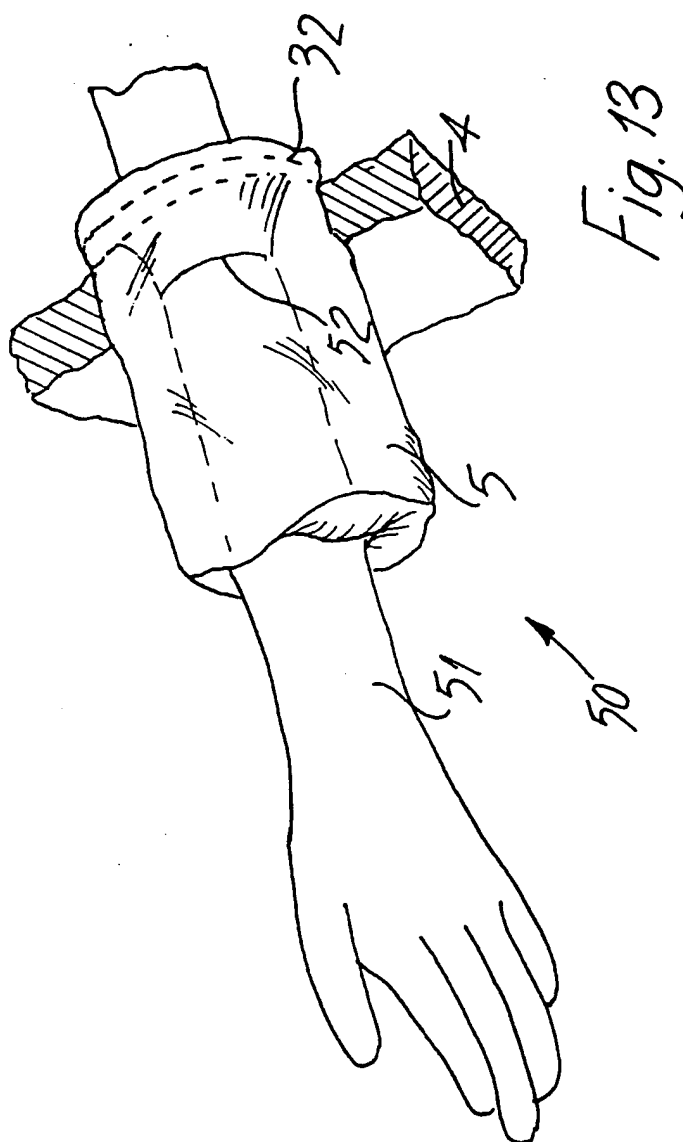

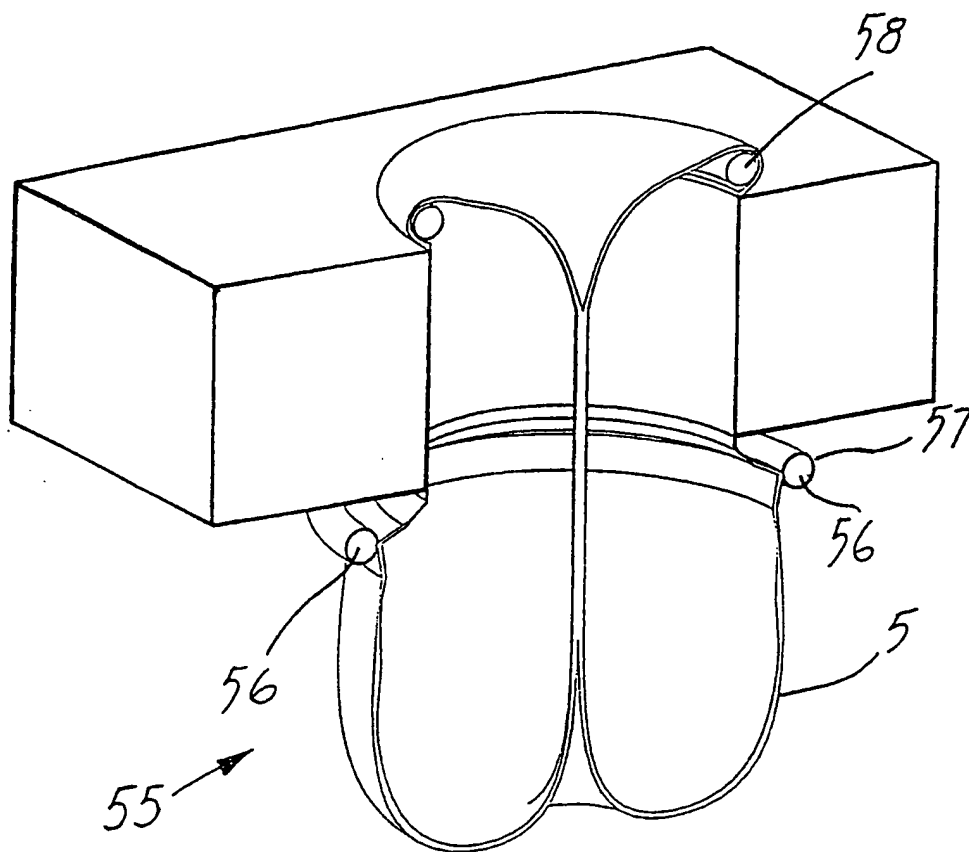*Fig. 14*

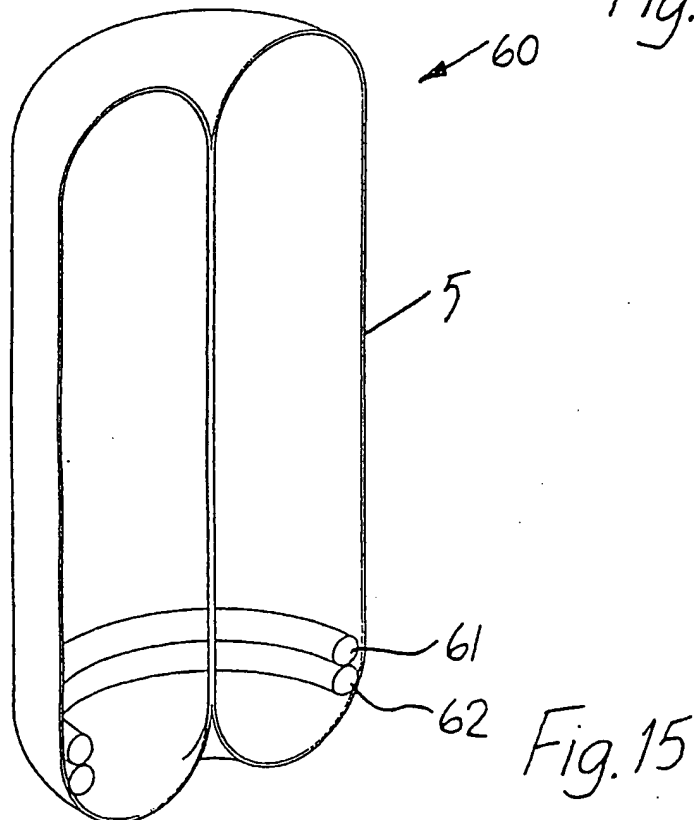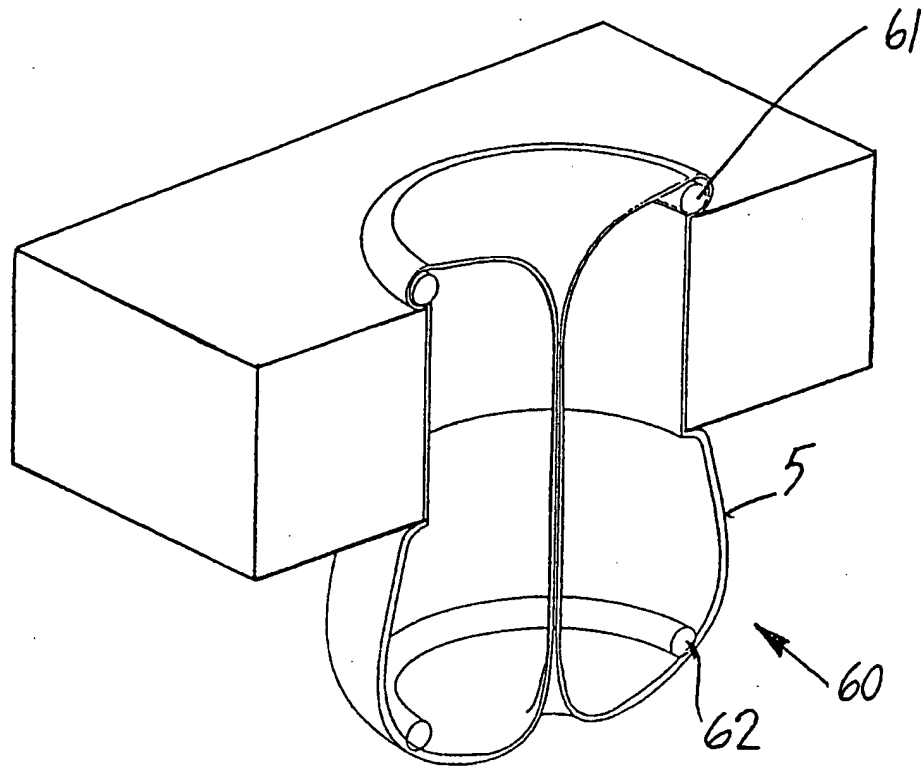

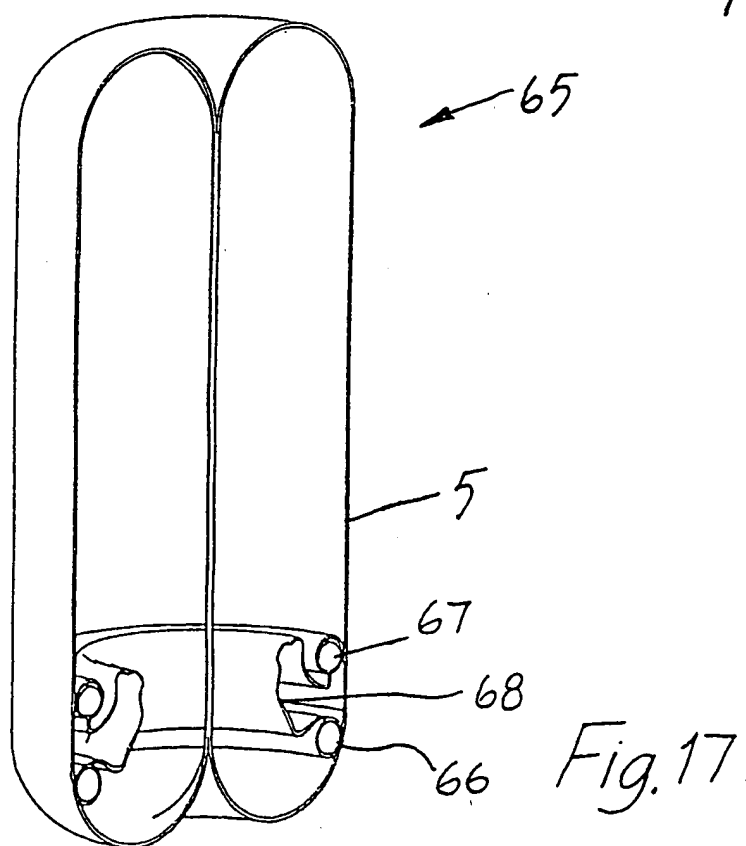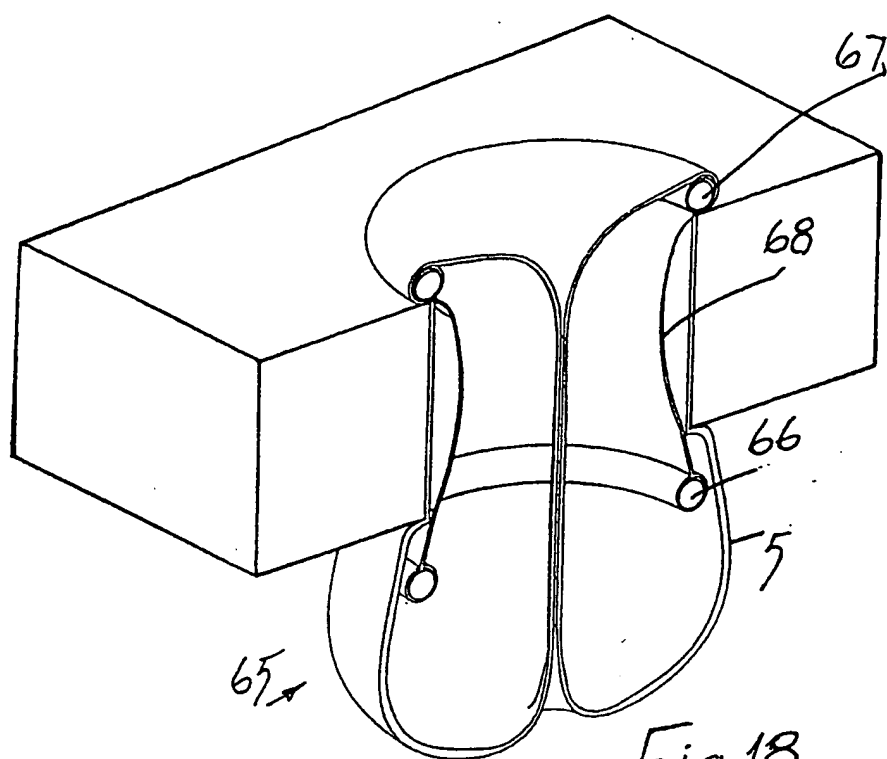

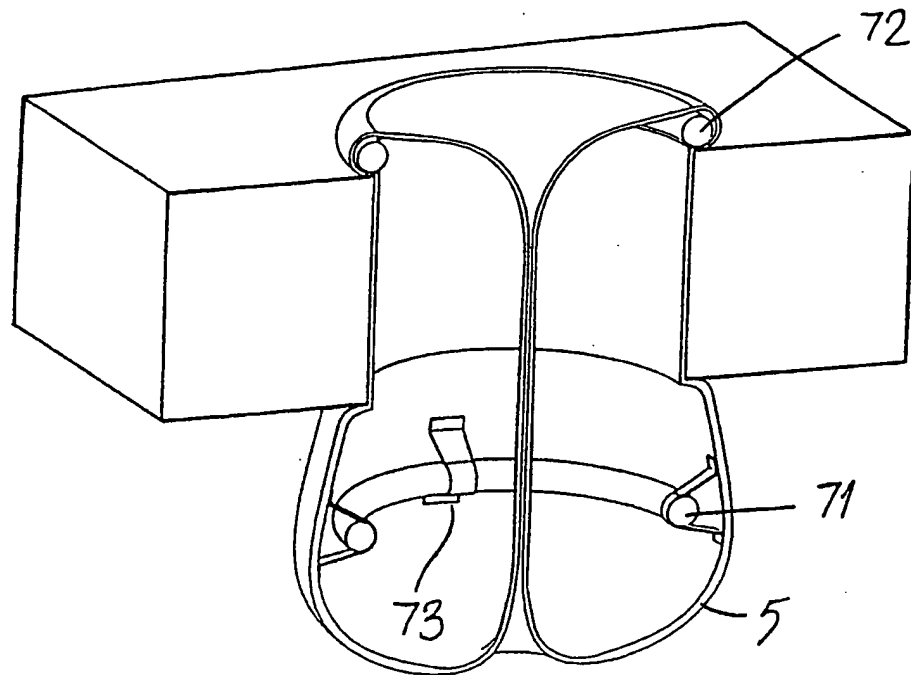


Fig. 20

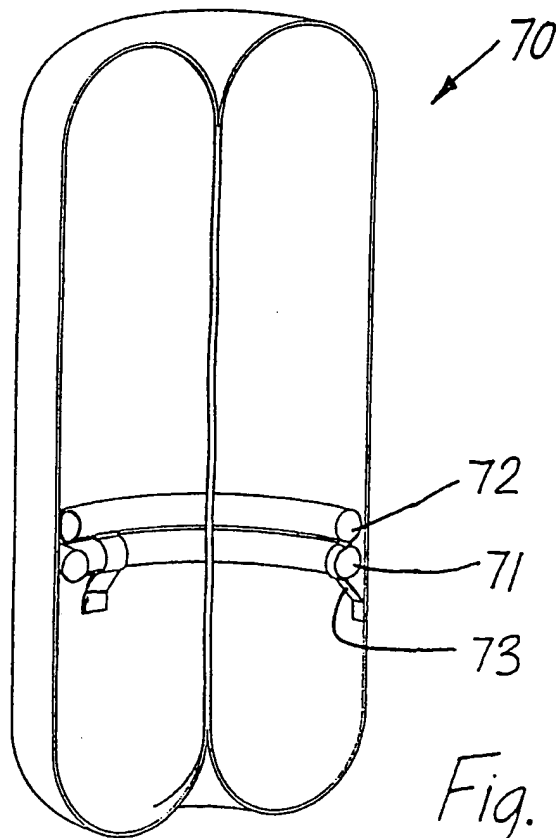


Fig. 19

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/IE 99/00127

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61B17/34

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 634 937 A (MOLLENAUER KENNETH H ET AL) 3 June 1997 (1997-06-03) column 10, line 16 - line 50	1-6, 9, 15
X	US 5 636 645 A (OU HONZEN) 10 June 1997 (1997-06-10) cited in the application column 6, line 34 - line 54	1, 3-6, 15-17
A	US 5 803 921 A (BONADIO FRANK) 8 September 1998 (1998-09-08) cited in the application figure 6	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

15 February 2000

Date of mailing of the international search report

07/03/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3018

Authorized officer

Gérard, B

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IE 99/00127

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☒ Claims Nos.: 18
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:

The subject-matter of the claim is not clear within the meaning of Article 6 PCT, such claims fall under Rule 6.2(a) PCT.

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this International application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

☐ The additional search fees were accompanied by the applicant's protest.

☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IE 99/00127

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5634937 A	03-06-1997	WO 9636283 A US 5964781 A	21-11-1996 12-10-1999
US 5636645 A	10-06-1997	NONE	
US 5803921 A	08-09-1998	IE 940150 A IE 940613 A IE 950055 A AT 164303 T AU 695770 B AU 1717395 A BR 9506817 A CA 2183064 A CN 1144471 A CZ 9602404 A DE 69501880 D DE 69501880 T EP 0744922 A EP 0807416 A ES 2115365 T FI 963226 A HU 76016 A, B WO 9522289 A JP 9509079 T NO 963421 A NZ 279907 A PL 315939 A ZA 9501378 A	04-10-1995 04-10-1995 07-08-1996 15-04-1998 20-08-1998 04-09-1995 09-09-1997 24-08-1995 05-03-1997 16-04-1997 30-04-1998 23-07-1998 04-12-1996 19-11-1997 16-06-1998 17-10-1996 30-06-1997 24-08-1995 16-09-1997 14-10-1996 26-06-1998 09-12-1996 24-10-1995